



Techform TC-533 Peel-able Solder Mask Product# 53-4008-0533, 53-4003-0533, 53-4004-0533

Product Description

Kester peel-able mask is a high-temperature flexible solder masking compound specially formulated of natural latex rubber. Prevent solder from flowing into contacts, terminals, screw heads and plated through holes.

Latex has been chemically enhanced so that it is heat stable enough for wave soldering processes. Effectively mask and protect the board from the time it is manufactured, through all assembly and reflow operations. NOTE: Not recommended on bare copper because ammonia may cause discoloration.

Features / Benefits

- Fast cure
- Easily peel-able
- Will not tarnish gold or phosphor bronze
- Protects delicate components
- Nonflammable

Packaging and Availability

For best results, apply a 15 to 20 mil coating to desired area. The substrate should be free from grease, oil, and particulate matter. Drying times depend upon thickness and ambient humidity. Techform TC-533 is not recommended for use on bare copper because discoloration could occur. Do not freeze.

Environmental Policy


Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray® products are supported by a global sale, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray® be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

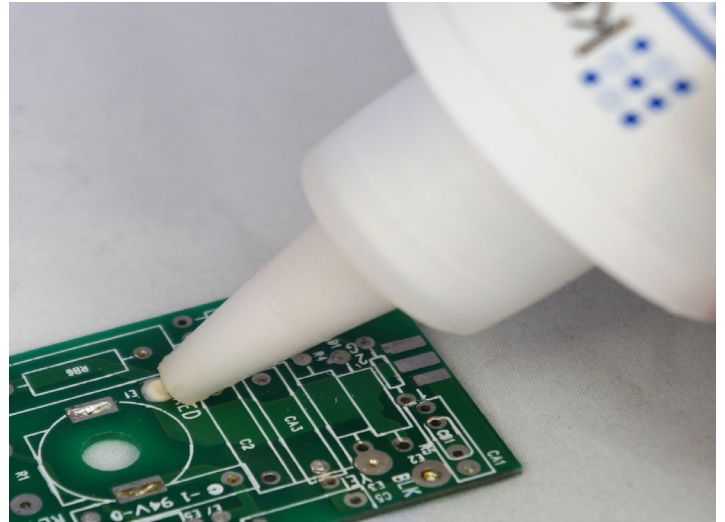

Typical Product Data and Physical Properties

Physical state:	Liquid
Color:	Tan, off-white
Odor:	Ammoniacal
Ph:	11
Boiling point:	100°C (212°F)
Vapor pressure:	1.9 kPa (14 mmHg)

Packaging and Availability

53-4001-0533	16 oz. Liquid	12 bottles/ case
	<i>Discontinued 11/2018</i>	
53-4008-0533	8 oz. Liquid	24 bottles / case
53-4003-0533	1 Gallon Liquid	
53-4004-0533	5 Gallon Liquid	



● **North America**
Techspray®
8125 Cobb Center Drive
Kennesaw, GA 30152
800-858-4043
tsales@techspray.com

● **Europe**
ITW Contamination Control BV
Saffierlaan 5, 2132 VZ Hoofddorp
The Netherlands
+31 88 1307 400
info@itw-cc.com

● **Countries outside the US**
Call to locate a distributor in your country